


MAIA MINI DUO

SPECIFICATIONS

base code	67251
typology	Projector
mounting	On surface by fixing base or on ground using stainless steel AISI 304 spike (code 69859) to be separately ordered as accessory
height	90 mm / 3.5"
diameter	40 mm / 1.6"
length	73 mm / 2.9"
construction	Fixture: turning and milling aluminum. Stainless steel A2 screws. Lens: PMMA. Protective glass complete with silicone gasket
finishes	Powder coated
ingress protection	IP66. North America: wet location. Built-in protection from water infiltration and moisture
lamp type	Power LED. Remote power supply not included
lamp wattage	2W at 24V DC and 500 mA
delivered lumens	125lm (3000K CRI93, 34°)
lumen maintenance	50.000h L85
beam	15°, 34°, 40°. Adjustable 330° on the vertical plane
kelvin	2700K CRI93, 3000K CRI93 and 4000K CRI93 / 2 step MacAdam ellipse
special features	Water Stop Technology. Reverse Polarity Protection. 24V DC: Thermal Sensor. Safe Wiring
control protocols	On/off only
certifications	CE, ETL listed (certified to UL 2108, CSA C22.2)



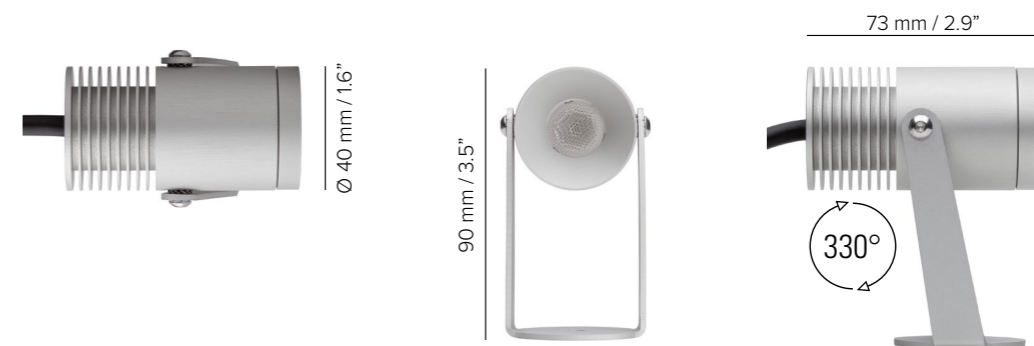

MAIA MINI DUO

ORDER CODE

BASE CODE

67251

A . POWER SUPPLY

- 2** 24V DC power supply NOT included
- L** 500 mA power supply NOT included
- R**  listed 24V DC power supply NOT included
- U**  listed 500 mA power supply NOT included

B . KELVIN

- 4** 4000K CRI93
- 5** 3000K CRI93
- 8** 2700K CRI93

C . BEAM

- 2** spot 15°
- 4** flood 34°
- 5** wide flood 40°



BASE CODE

Example: **67251 2 8 4 F = 67251-284F**

D . FINISHES

A grey RAL 9006



F golden bronze



Q anthracite RAL 7024



MAIA MINI DUO

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED

Power supply
24V DC*, ON/OFF
ambient temperature up to 60°C

code	output power	input voltage / frequency	IP	dimensions mm
69061	40W	90-305V	47-63Hz IP67	L171xW62xH37
69062	60W	90-305V	50-60Hz IP67	L171xW62xH37
69095	ON/OFF, 12W / max 4	90-264V	50-60Hz IP20	L115xW34xH19
69091	1-10V, 20W / max 9	99-264V	50-60Hz IP20	L120xW52xH22
69080	DALI, 20W / max 8	220-240V	50-60Hz IP20	L120xW52xH22
69206	DALI, 24W / max 10	99-264V	50-60Hz IP67	L122xW54xH26

Power supply
500 mA
max No. fixtures


Consult **B LIGHT North America**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com

Class 2 power supply
24V DC*
500 mA



code	description	dimensions mm
69842	IP68 connector, 1 IN - 1 OUT, 2 wires	W37xD22xH37
69843	IP68 connector, 1 IN - 3 OUT, series wiring, 4 wires	W78xD30xH20
69847	IP68 connector, 1 IN - 3 OUT, parallel wiring, 2 wires	W45xD30xH17

OPTIONAL ACCESSORIES



code	description	dimensions mm
69859	stainless steel AISI 304 spike	Ø42xH200

*To choose the power supply, always add a spare 20% as safety margin.
See pag 519 for cable size and max wiring distance from power supply to last connected luminaire