




# MAIA X2 DUO

## SPECIFICATIONS

base code	67261
typology	Projector
mounting	On surface by fixing base or on ground using stainless steel AISI 304 spike (code 69861) to be separately ordered as accessory
height	165 mm / 6.50"
diameter	99 mm / 3.90"
length	150 mm / 5.91"
construction	Fixture: turning and milling aluminum. Stainless steel A2 screws. Reflector: polycarbonate. Protective glass complete with silicone gasket
finishes	Powder coated
ingress protection	IP66. North America wet location. Built-in protection from water infiltration and moisture
lamp type	COB. Remote power supply not included
lamp wattage	20W at 48V DC and 700 mA. North America 700 mA
lamp lumens	2700K CRI93 - 2390lm, 3000K CRI93 - 2480lm, 4000K CRI93 - 2660lm
delivered lumens	2080lm (3000K CRI93, 45°)
lumen maintenance	50.000h L90
beam	22°, 45°, 58°. Adjustable 330° on the vertical plane
kelvin	2700K CRI93, 3000K CRI93 and 4000K CRI93 / 3 step MacAdam ellipse
special features	Water drainage system - Water stop technology. 48V DC: unpolarized electronic system - Thermal Sensor - Safe wiring
dimming options	Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for wet location

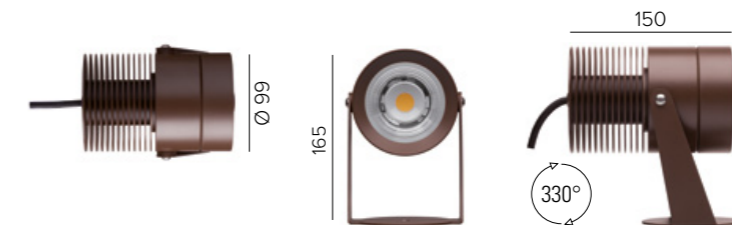

# MAIA X2 DUO

## ORDER CODE

### BASE CODE

67261

### A . POWER SUPPLY

- 8** 48V DC EXCL. power supply
- L** 700 mA EXCL. power supply
- U**  listed 700 mA EXCL. power supply

### B . KELVIN

- 4** 4000K CRI93
- 5** 3000K CRI93
- 8** 2700K CRI93

### C . BEAM

- 2** spot 22°
- 4** flood 45°
- 5** wide flood 58°

Example: BASE CODE A B C D  
**67261 8 8 4 A = 67261-884A**

### D . FINISHES

**A** grey RAL 9006



**F** golden bronze



**Q** anthracite RAL 7024



# MAIA X2 DUO

## ACCESSORIES

### REQUIRED ACCESSORIES - NOT INCLUDED

code	output power	input voltage / frequency	IP	dimensions mm
69180	30W	90-264V	47-63Hz IP20	L160xW46xH30
69181	40W	90-305V	47-63Hz IP67	L163xW43xH32
69182	60W	90-305V	47-63Hz IP67	L163xW43xH32
69187	100W	90-305V	47-63Hz IP67	L220xW68xH39
69185	40W	90-305V	47-63Hz IP67	L171xW62xH37
69186	60W	90-305V	47-63Hz IP67	L171xW62xH37
69187	100W	90-305V	47-63Hz IP67	L220xW68xH39
69195	75W	100-305V	47-63Hz IP67	L180xW63xH36
69196	100W	100-305V	47-63Hz IP67	L199xW63xH36
'on / off only				
69089	ON/OFF, 25W / max 1	176-264V	50-60Hz IP20	L135xW38xH28
69092	1-10V, 25W / max 1	99-264V	50-60Hz IP20	L103xW67xH21
69074	DALI, 32W / max 1	110-240V	50-60Hz IP20	L103xW67xH21
69207	DALI, 30W / max 1	99-264V	50-60Hz IP67	L122xW54xH26

Power supply 48V DC\* ON/OFF


Power supply 48V DC\* ON/OFF for ambient temperature up to 60° C

Power supply 48V DC\* DALI® for ambient temperature up to 60° C

Power supply 700 mA max No. fixtures


Class 2 power supply 700 mA

Consult **B LIGHT North America**  
 Lighting Group Network  
 T: 212.775.6363  
 E: info@lightinggroupnetwork.com

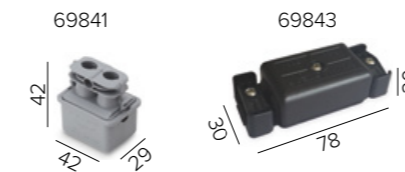

code	description	dimensions mm
69841	IP68 connector, 1 IN - 1 OUT, 3 wires	W42xD29xH42
69843	IP68 connector, 1 IN - 3 OUT, parallel wiring, 4 wires	W78xD30xH20

### OPTIONAL ACCESSORIES

code	page	description	input voltage	IP	dimensions mm
69102/69103		 Control unit 48V DC Dimmer interface 0-10V interface	48V DC	IP20	W58xD35xH16
69103	554	Control unit 48V DC DMX interface	48V DC	IP20	W58xD35xH16

code	description	dimensions mm
69861	stainless steel AISI 304 spike	Ø95xH200

### SPECIAL FEATURE: WATER DRAINAGE SYSTEM



When aimed upwards, the water is collected in the cup and is drained from the bezel cavities

