




MAIA X2 DUO

SPECIFICATIONS

base code	67261
typology	Projector
mounting	On surface by fixing base or on ground using stainless steel AISI 304 spike (code 69861) to be separately ordered as accessory
height	165 mm / 6.5"
diameter	99 mm / 3.9"
length	150 mm / 5.9"
construction	Fixture: turning and milling aluminum. Stainless steel A2 screws. Reflector: polycarbonate. Protective glass complete with silicone gasket
finishes	Powder coated
ingress protection	IP66. North America wet location. Built-in protection from water infiltration and moisture
lamp type	COB. Remote power supply not included
lamp wattage	20W at 48V DC and 700 mA. North America 700 mA
lamp lumens	2700K CRI93 - 2390lm, 3000K CRI93 - 2480lm, 4000K CRI93 - 2660lm
delivered lumens	2080lm (3000K CRI93, 45°)
lumen maintenance	50.000h L90
beam	22°, 45°, 58°. Adjustable 330° on the vertical plane
kelvin	2700K CRI93, 3000K CRI93 and 4000K CRI93 / 3 step MacAdam ellipse
special features	Water drainage system. Water stop technology. 48V DC: unpolarized electronic system. Thermal Sensor. Safe wiring. Two wires
dimming options	dimming Push button, potentiometer, 0-10V, DALI, DMX, KNX. Dimming options depend on power supply and additional control units to be separately ordered as accessories
listings	CE, ETL listed for wet location



MAIA X2 DUO

ORDER CODE

BASE CODE

67261

A . POWER SUPPLY

- 8** 48V DC power supply NOT included
- L** 700 mA power supply NOT included
- U**  listed 700 mA power supply NOT included

B . KELVIN

- 4** 4000K CRI93
- 5** 3000K CRI93
- 8** 2700K CRI93

C . BEAM

- 2** spot 22°
- 4** flood 45°
- 5** wide flood 58°



Example: BASE CODE A B C D
67261 8 8 4 A = 67261-884A

D . FINISHES

A grey RAL 9006



F golden bronze



Q anthracite RAL 7024



MAIA X2 DUO

ACCESSORIES

REQUIRED ACCESSORIES - NOT INCLUDED


Power supply 48V DC*, ON/OFF ambient temperature up to 60° C

Power supply 48V DC*, DALI® ambient temperature up to 60° C

Power supply 48V DC, 1-10V and DALI

Power supply 700 mA max No. fixtures

Class 2 power supply 700 mA

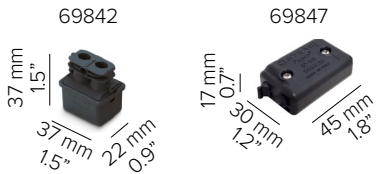


code	output power	input voltage / frequency		IP	dimensions mm
69185	40W	90-305V	47-63Hz	IP67	L171xW62xH37
69186	60W	90-305V	47-63Hz	IP67	L171xW62xH37
69187	100W	90-305V	47-63Hz	IP67	L220xW68xH39
69195	75W	100-305V	47-63Hz	IP67	L180xW63xH36
69196	100W	100-305V	47-63Hz	IP67	L199xW63xH36
* for a perfect dimming, it is necessary that the power supply is saturated to 100%					
69096	55W	99-264V	50-60Hz	IP20	L129xW76xH30
69089	ON/OFF, 25W / max 1	176-264V	50-60Hz	IP20	L135xW38xH28
69092	1-10V, 25W / max 1	99-264V	50-60Hz	IP20	L103xW67xH21
69074	DALI, 32W / max 1	110-240V	50-60Hz	IP20	L103xW67xH21
69207	DALI, 30W / max 1	99-264V	50-60Hz	IP67	L122xW54xH26

Consult **B LIGHT North America**
Lighting Group Network
T: 212.775.6363
E: info@lightinggroupnetwork.com

code	description	dimensions mm
69842	IP68 connector, 1 IN - 1 OUT, 2 wires	W37xD22xH37
69847	IP68 connector, 1 IN - 2 OUT, parallel wiring, 2 wires	W45xD30xH17

OPTIONAL ACCESSORIES



code	description	dimensions mm
69861	stainless steel AISI 304 spike	Ø95xH200

SPECIAL FEATURE: WATER DRAINAGE SYSTEM



When aimed upwards, the water is collected in the cup and is drained from the bezel cavities

